



Connections

TTL-level Digital Input/Output

The PCI-1730U has 16 TTL-level digital inputs and 16 TTL-level digital outputs. The following figure shows connections to exchange digital signals with other TTL devices:

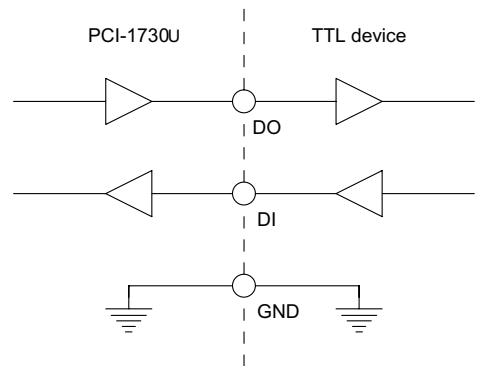


If you want to receive an OPEN/SHORT signal from a switch or relay, add a pull-up resistor to ensure that the input is held at a high level when the contacts are open. See the figure below:

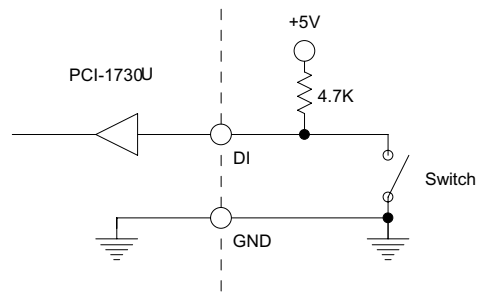

Isolated Digital Input


Each of the 16 isolated digital input channels accept voltages from 5 to 30 V. Every eight input channels share one external common. (Channels 0 ~ 7 use **ECOM0**. Channels 8 ~ 15 use **ECOM1**.) The following figure shows how to connect an external input source to the card's isolated inputs.

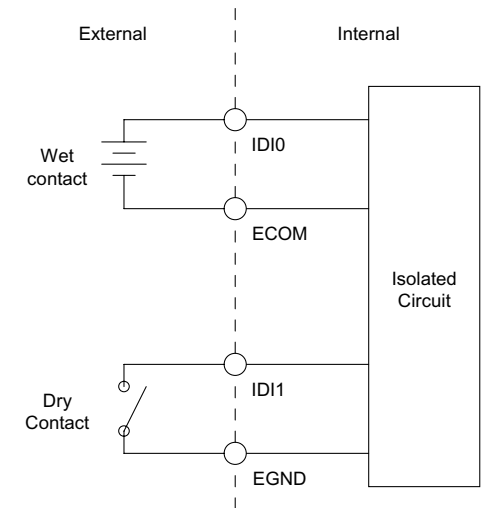

Isolated Digital Output

PCI-1730U provides 16 isolated DO channels. If the external voltage (5 ~ 40V) is connected to each isolated output channel (**IDO**) and its isolated digital output turns on (300 mA per channel maximum), the card's current will sink from the external voltage.

CN5 provides two **EGND** pins for IDO connection.

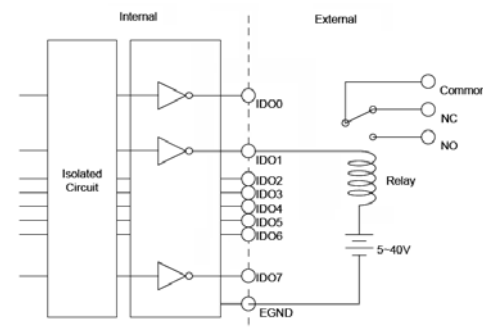

For more information on this and other Advantech products, please visit our websites at:
<http://www.advantech.com/eAutomation>
 For technical support and service:
<http://www.advantech.com/support/>
 This startup manual is for PCI-1730U.
 Part No.2003173020

PCI-1730U

32-channel Isolated Digital I/O Card

Packing List

Before installation, please make sure that you have received the following:

- PCI-1730U card
- Driver CD
- Quick Start User Manual

If anything is missing or damaged, contact your distributor or sales representative immediately.

User Manual

For more detailed information on this product, please refer to the PCI-1730U_1733_1734 User Manual on the CD-ROM (PDF format).
 CD:\Documents\Hardware Manuals\PCI.

Declaration of Conformity

FCC Class A

This equipment has been tested and found to comply with the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause interference in which case the user is required to correct interference at his own expense.

CE

This product has passed the CE test for environmental specifications when shielded cables are used for external wiring. We recommend the use of shielded cables. This kind of cable is available from Advantech. Please contact your local supplier for ordering information.

Overview

The Advantech PCI-1730U is a 32-channel isolated digital input/output card for the PCI bus. For easy monitoring, each isolated digital input channel is equipped with one red LED, and each isolated digital output channel is equipped with one green LED to show its ON/OFF status. The PCI-1730U's isolated digital input channels are ideal for digital input in noisy environments or with floating potentials. The PCI-1730U provides specific functions for different user requirements.

Notes

For more information on this and other Advantech products, please visit our websites at:
<http://www.advantech.com/eAutomation>
 For technical support and service:
<http://www.advantech.com/support/>
 This startup manual is for PCI-1730U.
 Part No.2003173020

1st Edition
 April 2009

Specifications

Isolated Digital Input

Number of Channel	16 (bi-directional)	
Optical Isolation	2,500 Vdc	
Opto-isolator response time	25 μs	
Over-voltage Protect	70 Vdc	
Input Voltage	VIH (max.)	30 Vdc
	VIH (min.)	5 Vdc
	VIL (max.)	2 Vdc
Input Current	5 Vdc	1.4 mA (typical)
	12 Vdc	3.9 mA (typical)
	24 Vdc	8.2 mA (typical)
	30 Vdc	10.3 mA (typical)

Isolated Digital Output

Number of Channel	16
Optical Isolation	2,500 Vdc
Output Voltage	Open collector 5 to 40 Vdc
Sink/Source Current	200 mA max./channel

Non-isolated Digital Input/Output


Input Channels	16	
Input Voltage	Low	0.8 V max.
	High	2.0V min.
Output Channels	16	
Output Voltage	Low	0.5 V max. @ + 24 mA (sink)
	High	2.4V min. @ - 15 mA (source)

General

I/O Connector Type	37-pin D-Sub female	
Dimensions	175 mm x 100 mm (6.9" x 3.9")	
Power Consumption	Typical	+5 V @ 250 mA +12 V @ 35 mA
	Max.	+5 V @ 400A +12 V @ 60mA
Temperature	Operation	0 ~ +60°C (32~ 140°F) (refer to IEC 68 - 2 - 1 , 2)
	Storage	-20 ~ +85°C (-4 ~185°F)
Relative Humidity	5 ~ 95% RH non-condensing (refer to IEC 68-2-3)	
Certification	CE certified	

Installation

Software Installation

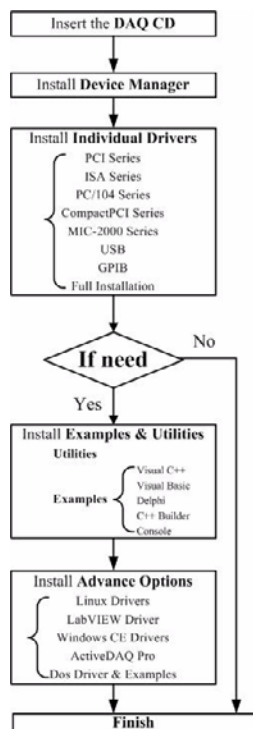

Hardware Installation

1. Turn off your computer and unplug the power cord and cables. TURN OFF your computer before installing or removing any components on the computer.
2. Remove the cover of your computer.
3. Remove the slot cover on the back panel of your computer.
4. Touch the metal part on the surface of your computer to neutralize the static electricity that might be on your body.
5. Insert the PCI-1730U card into a PCI slot. Hold the card only by its edges and carefully align it with the slot. Insert the card firmly into place. Use of excessive force must be avoided; otherwise, the card might be damaged.
6. Fasten the bracket of the PCI card on the back panel rail of the computer with screws.
7. Connect appropriate accessories (37-pin cable, wiring terminals, etc. if necessary) to the PCI card.
8. Replace the cover of your computer chassis. Re-connect the cables you removed in step 2.
9. Plug in the power cord and turn on the computer.

PIN Assignments

CN1				CN2			
IDO 0	1	2	IDO 1	IDI 0	1	2	IDI 1
IDO 2	3	4	IDO 3	IDI 2	3	4	IDI 3
IDO 4	5	6	IDO 5	IDI 4	5	6	IDI 5
IDO 6	7	8	IDO 7	IDI 6	7	8	IDI 7
IDO 8	9	10	IDO 9	IDI 8	9	10	IDI 9
IDO 10	11	12	IDO 11	IDI 10	11	12	IDI 11
IDO 12	13	14	IDO 13	IDI 12	13	14	IDI 13
IDO 14	15	16	IDO 15	IDI 14	15	16	IDI 15
EGND	17	18	EGND	ECOM0	17	18	ECOM1
NC	19	20	NC	ECOM0	19	20	ECOM1

CN3				CN4			
DO 0	1	2	DO 1	DI 0	1	2	DI 1
DO 2	3	4	DO 3	DI 2	3	4	DI 3
DO 4	5	6	DO 5	DI 4	5	6	DI 5
DO 6	7	8	DO 7	DI 6	7	8	DI 7
DO 8	9	10	DO 9	DI 8	9	10	DI 9
DO 10	11	12	DO 11	DI 10	11	12	DI 11
DO 12	13	14	DO 13	DI 12	13	14	DI 13
DO 14	15	16	DO 15	DI 14	15	16	DI 15
GND	17	18	GND	GND	17	18	GND
+5 V	19	20	+12 V	+5 V	19	20	+12 V

CN5	
EGND	1 2 EGND

PIN Assignments

CN6					
IDI 0	1	20	IDI 1		
IDI 2	2	21	IDI 3		
IDI 4	3	22	IDI 5		
IDI 6	4	23	IDI 7		
IDI 8	5	24	IDI 9		
IDI 10	6	25	IDI 11		
IDI 12	7	26	IDI 13		
IDI 14	8	27	IDI 15		
ECOM0	9	28	ECOM1		
NC	10	29	EGND		
IDO 0	11	30	IDO 1		
IDO 2	12	31	IDO 3		
IDO 4	13	32	IDO 5		
IDO 6	14	33	IDO 7		
IDO 8	15	34	IDO 9		
IDO 10	16	35	IDO 11		
IDO 12	17	36	IDO 13		
IDO 14	18	37	IDO 15		
NC	19				

Description of pin use:

IDI_n (n=0 ~ 15):

Isolated digital input

IDO_n (n=0 ~ 15):

Isolated digital output

ECOM_n (n=0 ~ 1):

External common Vcc/GND of IDI

NC:

Not connected

EGND:

External ground for IDO

DI_n (n=0 ~ 15):

Digital input

DO_n (n=0 ~ 15):

Digital output

GND:

Digital ground