PAC-400G
5-slot Half-size Compact Chassis

Power LED
HDD LED
Reset button
2 x USB ports

LPT opening

COM opening

7G000-ST1110L-RS
SATA removable drive

3.5" SATA removable drive bay compatible

FDD and HDD are not included in package
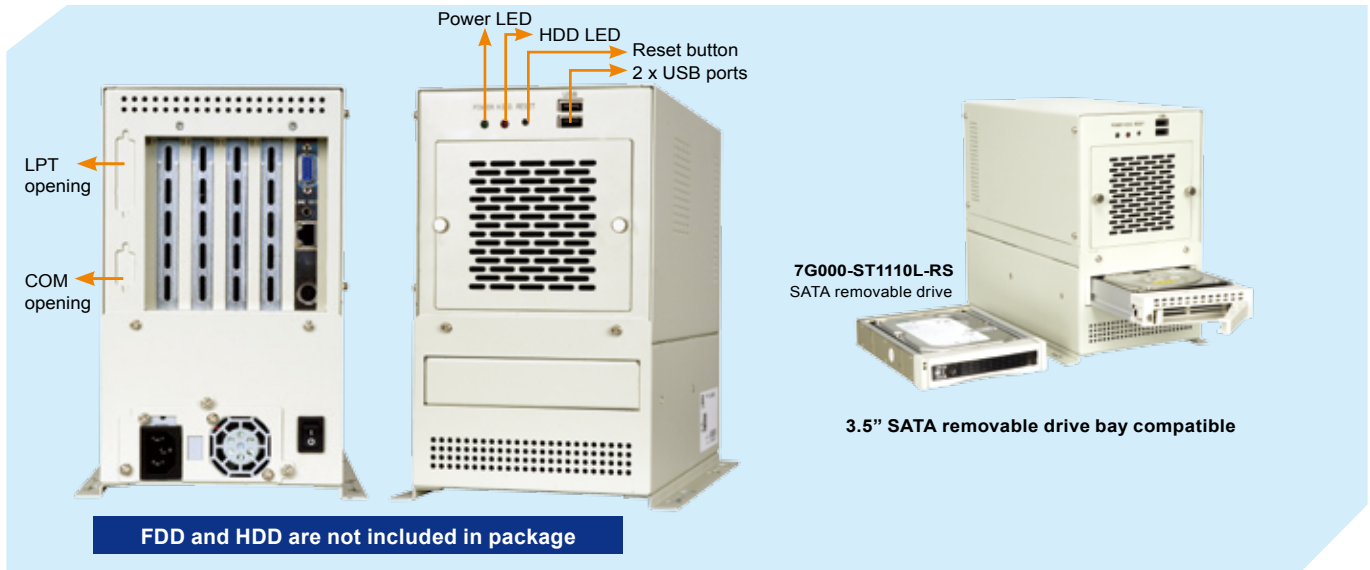
Features

◆ RoHS compliant design
◆ Two USB ports on the front panel
◆ One, 8 cm hot swappable fan
◆ One 3.5" internal HDD bay
◆ One 3.5" drive bay, for optional removable drive
◆ Supports Pentium 4 half-size CPU card

## Specifications

◆ **Construction**	Heavy duty metal
◆ **SBC Form Factor**	Half-size, slot SBC
◆ **Drive Bays**	1 x 3.5" HDD
◆ **Cooling Fans**	1 x 8 cm
◆ **I/O Ports**	2 x USB
◆ **I/O Openings**	1 x LPT, 1 x COM
◆ **Expansion Slots**	5 slots
◆ **Indicators**	Power, HDD
◆ **Buttons**	Power switch, reset
◆ **Operating Temperature**	0°C ~ 50°C
◆ **Operation Humidity**	10% ~ 90%
◆ **Color**	W: White
◆ **Weight (Net/Gross)**	3.8 kg/5.6 kg
◆ **Dimensions (DxWxH)**	269 mm x 140 mm x 230.5mm

Ordering Information

Part No.	Description
PAC-400GW-R11/916AP	5-slot half-size chassis, white, with ACE-916AP-RS, RoHS
PAC-400GW-R11/A618A	5-slot half-size compact chassis, white, 1 x 8 cm fan, with ACE-A618A-RS-R11 (180W ATX model), RoHS
7G000-ST1110L-RS	3.5" SATA removable drive bay with keylock, white, RoHS

Dimensions (measurement units: millimeter)

206mm
180mm
170mm
170mm
156mm
238mm
269mm
140mm
238mm
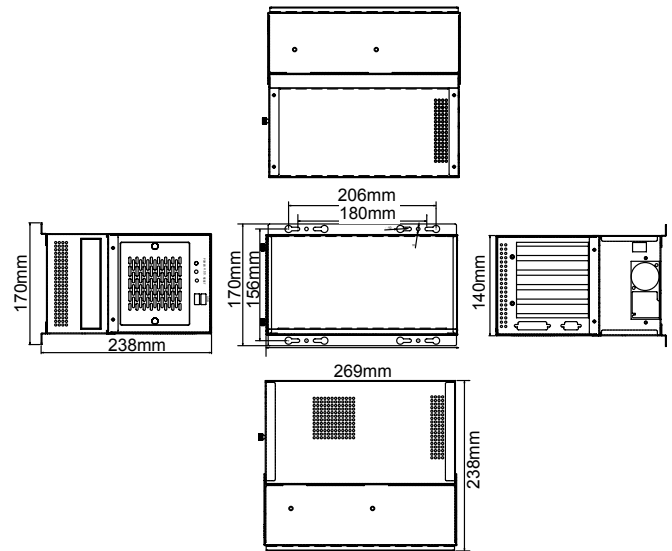
Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe			PSU Connector
				x1	x4	x16	
BP-4S-RS	ISA	0	4	0	0	0	AT
IP-4S-RS	PCISA	3	0	0	0	0	AT
IP-4S2-RS	PCISA	2	1	0	0	0	AT
IP-4S3-RS	PCISA	0	3	0	0	0	AT
IP-4S4-RS	PCISA	0	3	0	0	0	AT
IP-4SA-RS	PCISA	3	0	0	0	0	ATX
IP-4S2A-RS	PCISA	3	0	0	0	0	ATX
HPE-4S1	PCI/PICOe	3	0	0	0	0	ATX
HPE-4S2	PCI/PICOe	2	0	0	1	0	ATX

Power Supply Options

Type	Model No.	Watt
AT	ACE-916AP-RS	150W
ATX	ACE-A618A-RS-R11	180W

PAC-400G supports single 1U height PSU. For more IEI PSU models, please refer to section 5 or visit www.ieiworld.com.

www.ipc2u.ru   www.ipc2u.de   www.sovio.com   Date:01.06.2016